



SERIES

3 Applications - 1 Design Solution

The M Series offers a comprehensive site design solution for all your outdoor lighting needs.

MaxLite[®]


A singular housing design thrives as either an Area, Wall or Flood Fixture.



Area



Wall

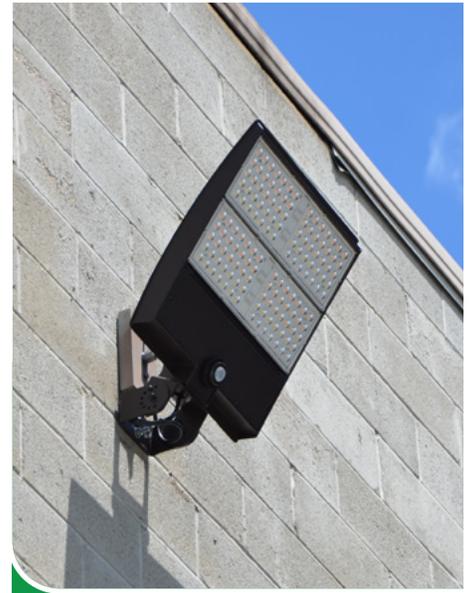

Flood



4 housing sizes cover 9 wattage outputs



40/55W
4,800 - 7,000 lm



75/100W
9,000 - 13,000 lm




125/150W
15,000 - 19,500 lm



200/250/320W
24,000 - 41,500 lm




All Fixtures are CCT Selectable



3000K



4000K

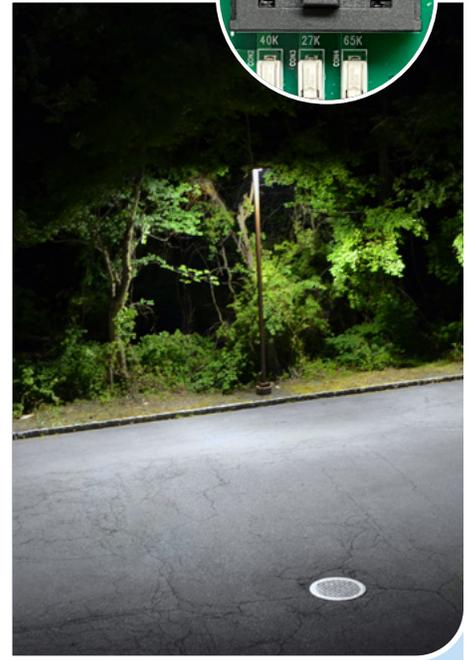

5000K

Multiple Control Capabilities



- Field installable c-Max Basic Controls
- Field installable c-Max Network Controls
- 3-pin or 7-pin twist lock receptacle for third party controls
- Avi-On network controls (factory installed)

c-Max Basic Controls



High Trim
Motion Sensing (PIR)
Photocell
Requires minimum
1 Remote Control
to program
(Sold Separately)



Photocell
No Remote Control
required

c-Max Network Controls




Bluetooth
High Trim
Scenes
Schedules
Works w/ c-Max app




Bluetooth
Motion Sensor (PIR)
Photocell (On/Off)
High Trim
Scenes
Schedules
Works w/ c-Max app


7 Lens Choices to Enhance Your Lighting Design

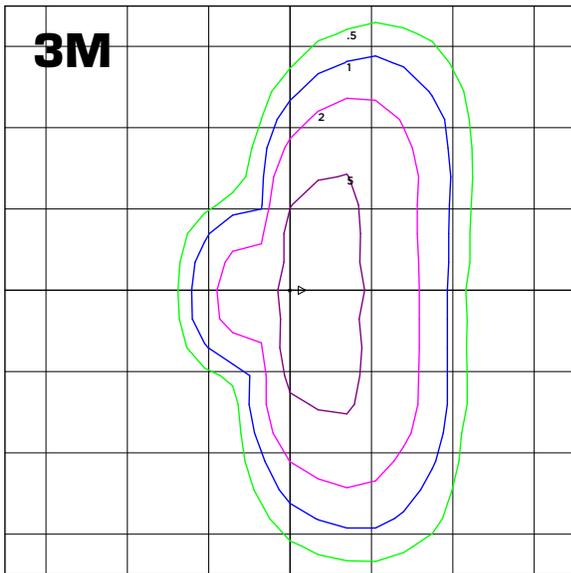


Type III Medium

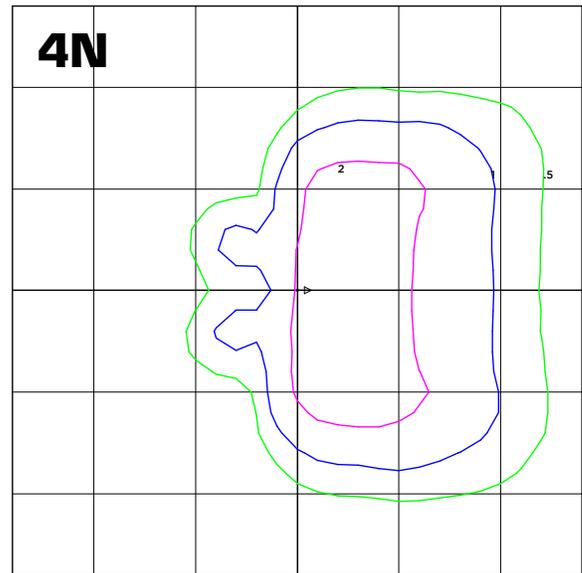


Type IV Narrow

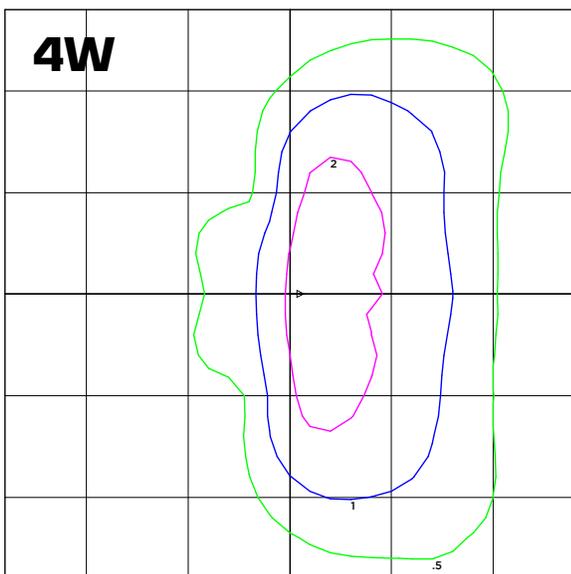


Type IV Wide

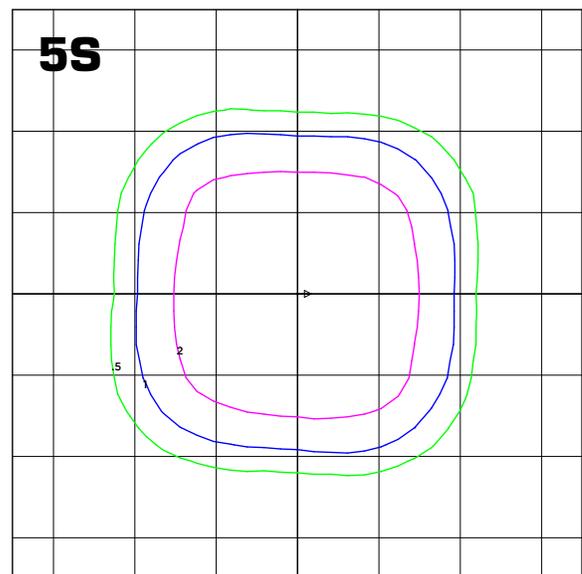


Type V Square/Flood Wide
(Soft Wide 6x7)

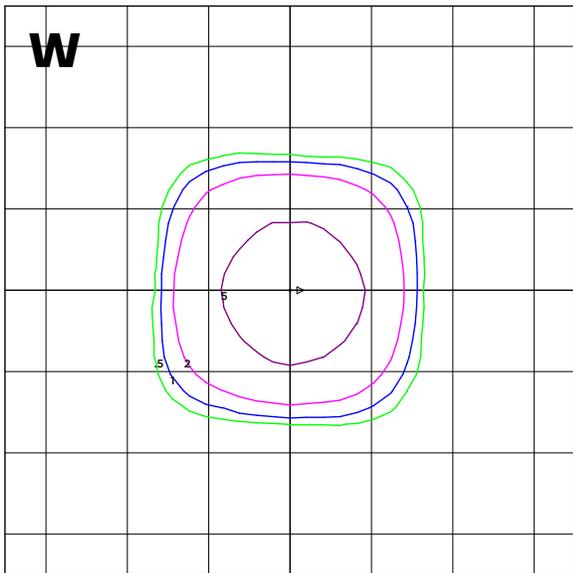


Type V Low Glare/Flood Wide
(Concentrated Wide 6x6)

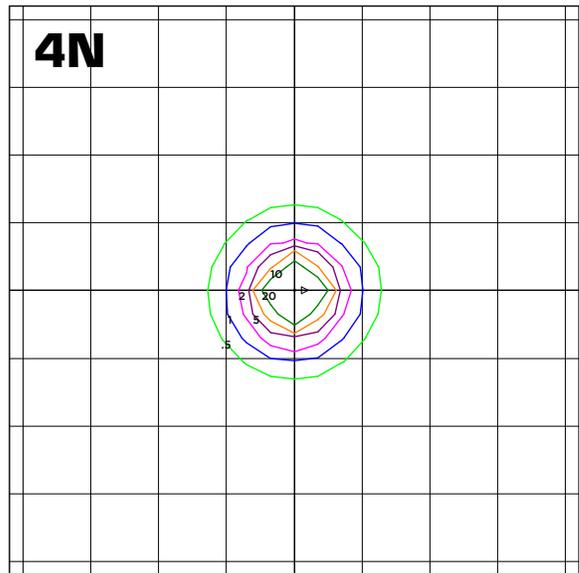

Flood Narrow 4x4

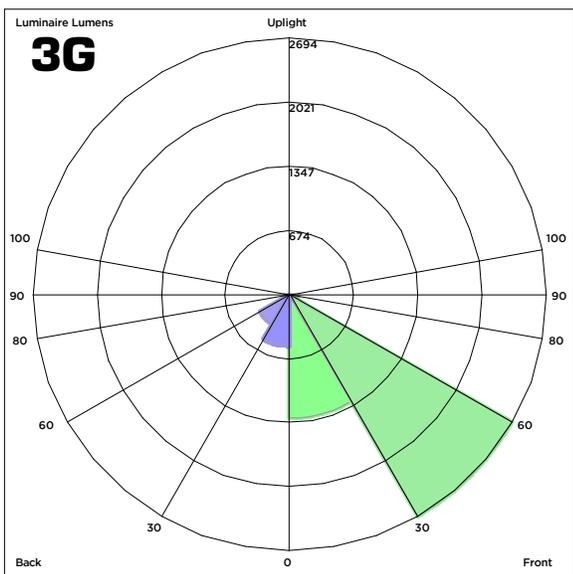

Type III Low Glare

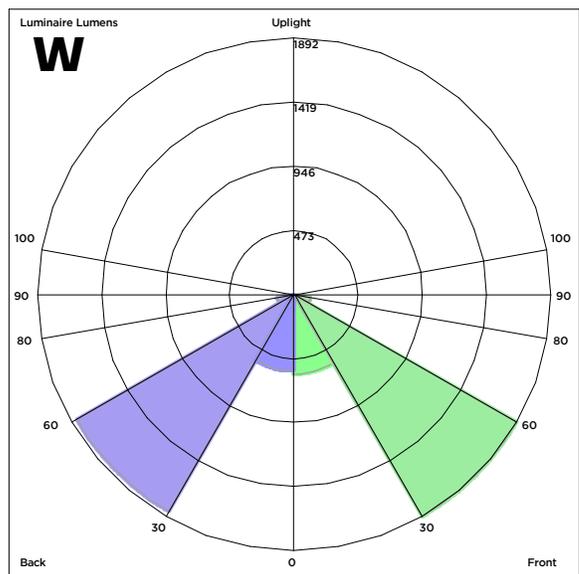

Type V Low Glare

6 Mounting Options Address Your Area, Flood & Wall Applications

ANSI 3G Rated for Vibration



Straight Arm Pole Mount
(Includes Labor Saving Slot Pattern)

ANSI 3G Rated for Vibration



Flexible Arm Pole Mount
Tilt Applications
(Includes Labor Saving Slot Pattern)

ANSI 3G Rated for Vibration



Knuckle Slipfitter
Covers 2 3/8" - 3" OD
(Outside Diameter)

ANSI 3G Rated for Vibration



Trunnion



Variable (Adjustable) Wall Mount



Fixed Wall Mount



Life Safety Wall Applications



EM Battery Backup Available

Factory Installed Back Box for 0°C (32°F) or -20°C (-4°F) Wall Applications

Field Installed Accessories



Backlight Shield

Reduces backlight to <10%



Visual Comfort Lens

Reduces glare & improves uniformity



Visors

Top or bottom, combine for full visor



Ordering Matrix

FAMILY	WATTAGE	VOLTAGE	DISTRIBUTION	-	CCT	COLOR	MOUNTING
M = M Series	40 = 40W	U = 120-277V	3G = Type 3 Low Glare	-	CS = 3000/4000/5000K	B = Dark Bronze <i>Contact Maxlite for additional finishes</i>	A = Straight Arm, Pole Mount
	55 = 55W	H = 277-480V	3M = Type 3 Medium				F = Flexible Arm, Pole Mount
	75 = 75W		4N = Type 4 Narrow				K = Knuckle Slip Fitter
	100 = 100W		4W = Type 4 Wide				T = Trunnion
	125 = 125W		5S = Type 5 Square/Flood Soft Wide (6x7)				V = Variable (Adjustable) Wall Mount
	150 = 150W		N = Narrow Flood (4x4)				W = Fixed Wall Mount
	200 = 200W		Flood Concentrated				
	250 = 250W		W = Wide (6x6), Type 5 Low Glare				
320 = 320W							

OPTIONS	EM OPTIONS	OTHER CONTROLS
CR = Controls Ready, C-Max Compatible	E0 = Battery Backup, 0°C, Wall Applications Only	RPC = 3-pin Twist Lock Receptacle
AV = Avi-on Controls (factory installed)	E2 = Battery Backup, -20°C, Wall Applications Only	PR7 = 7-pin Twist Lock Receptacle

EM and Other Controls are factory installed.

Product Video:



Controls Installation Video:



MaxLite[®]
A NEW WAVE OF LIGHT

12 York Ave.
West Caldwell, NJ 07006
T: 1-800-555-5629
F: 973-244-7333
www.maxlite.com

Item # **M SERIES BROCHURE**
Order Code: **106899**