



# M SERIES

## Three Applications - One Design Solution

The M Series offers a comprehensive site design solution for all your outdoor lighting needs.

**MaxLite**®




A singular housing design thrives as either an Area, Wall or Flood Fixture.



Area



Wall

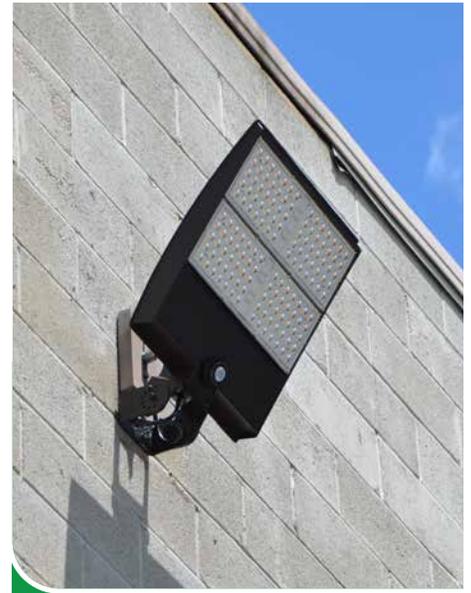

Flood



4 housing sizes cover 9 wattage outputs



**40/55W**  
4,800 - 7,000 lm



**75/100W**  
9,000 - 13,000 lm



**125/150W**  
15,000 - 19,500 lm



**200/250/320W**  
24,000 - 41,500 lm




All Fixtures are CCT Selectable



**3000K**



**4000K**

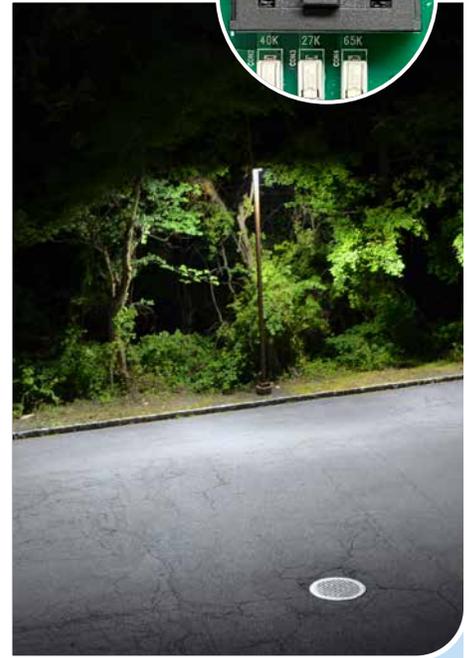

**5000K**

## Multiple Control Capabilities



- Field installable c-Max Basic Controls
- Field installable c-Max Network Controls
- 3-pin or 7-pin twist lock receptacle for third party controls
- Avi-On network controls (factory installed)

### c-Max Basic Controls



High Trim  
Motion Sensing (PIR)  
Photocell  
Requires minimum  
1 Remote Control  
to program  
(Sold Separately)



Photocell  
No Remote Control  
required

### c-Max Network Controls




Bluetooth  
High Trim  
Scenes  
Schedules  
Works w/ c-Max app




Bluetooth  
Motion Sensor (PIR)  
Photocell (On/Off)  
High Trim  
Scenes  
Schedules  
Works w/ c-Max app


# 7 Lens Choices to Enhance Your Lighting Design

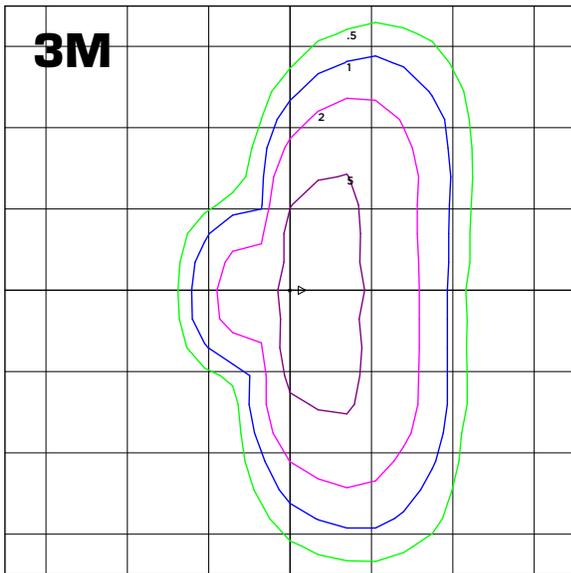


Type III Medium

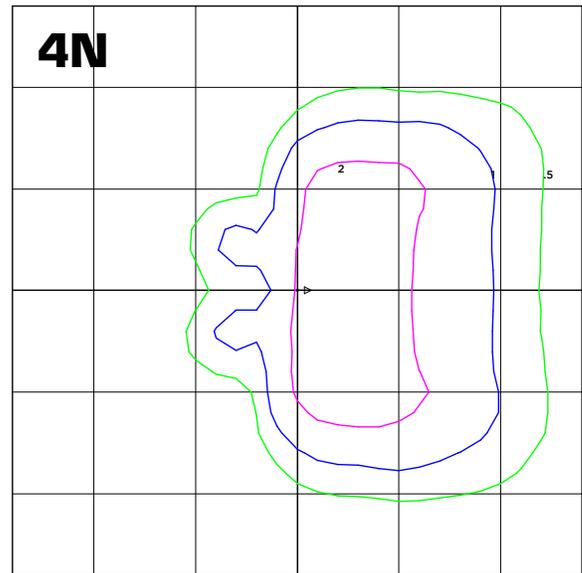


Type IV Narrow

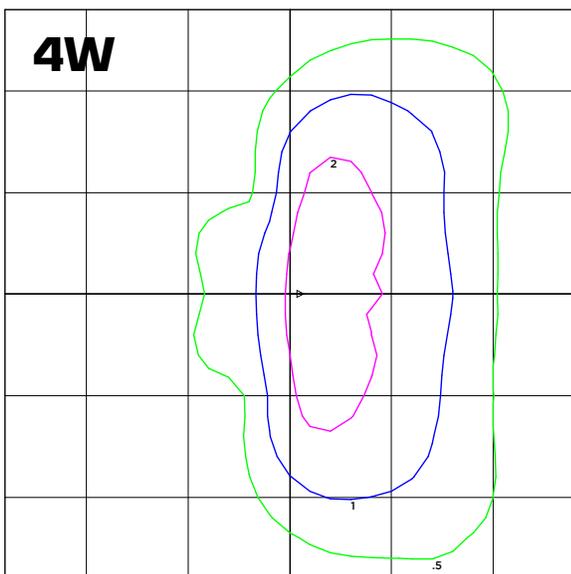


Type IV Wide

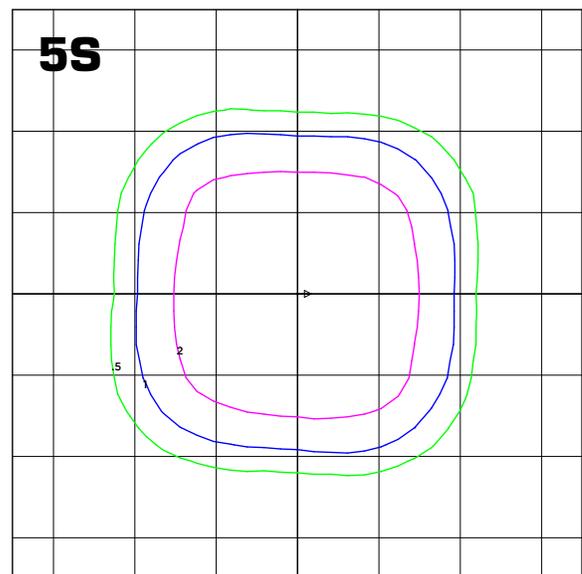


Type V Square/Flood Wide  
(Soft Wide 6x7)

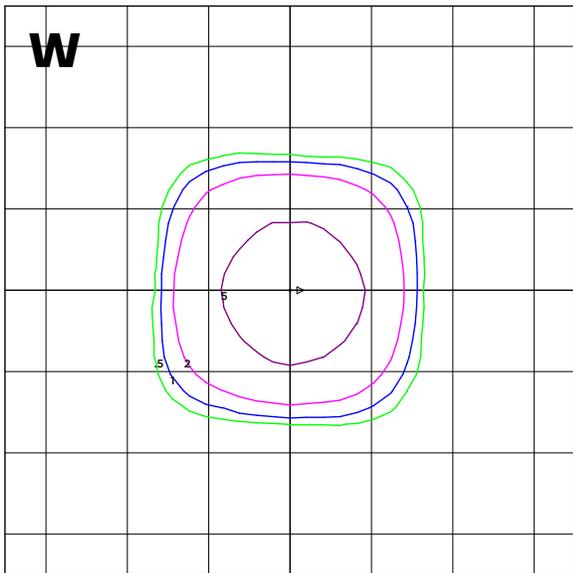


**Type V Low Glare/Flood Wide**  
(Concentrated Wide 6x6)

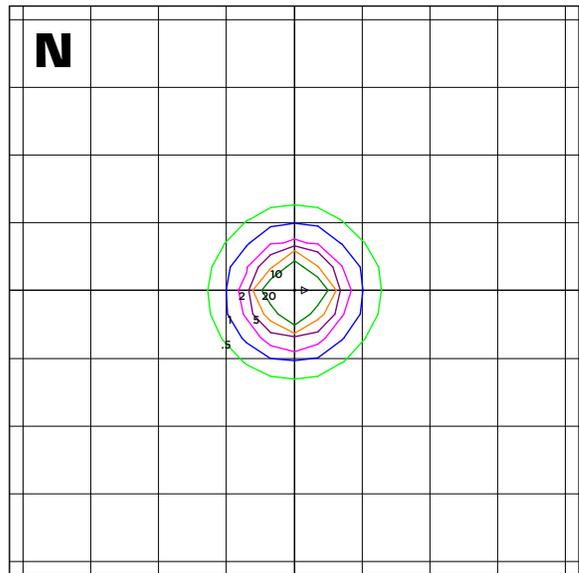

**Flood Narrow 4x4**

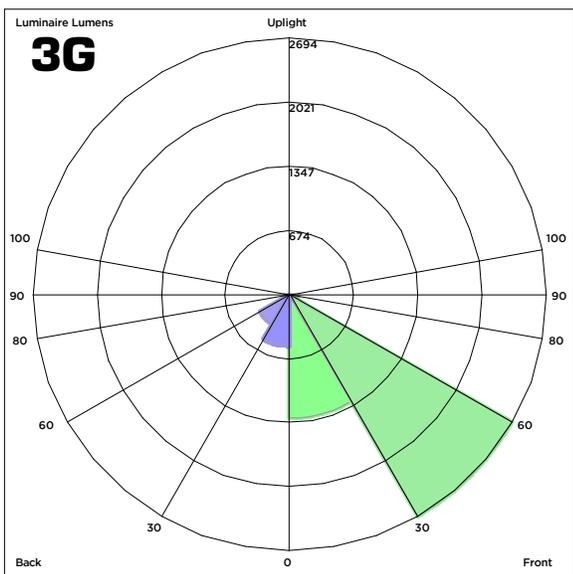

**Type III Low Glare**

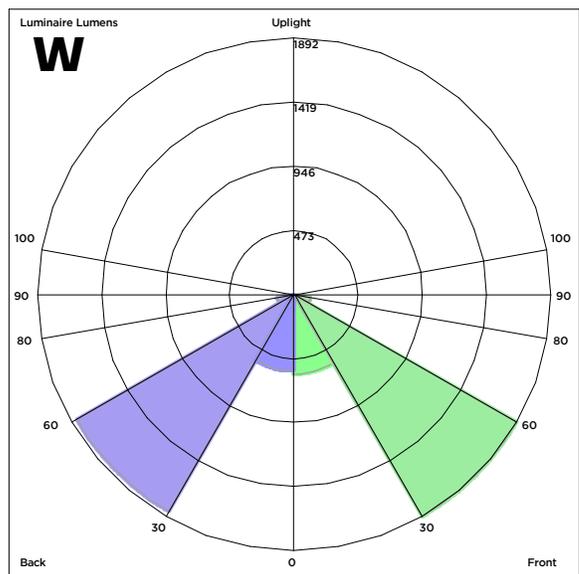

**Type V Low Glare**

# 6 Mounting Options Address Your Area, Flood & Wall Applications

*ANSI 3G Rated for Vibration*



**Straight Arm Pole Mount**  
(Includes Labor Saving Slot Pattern)

*ANSI 3G Rated for Vibration*



**Flexible Arm Pole Mount**  
Tilt Applications  
(Includes Labor Saving Slot Pattern)

*ANSI 3G Rated for Vibration*



**Knuckle Slipfitter**  
Covers 2 3/8" - 3" OD  
(Outside Diameter)

*ANSI 3G Rated for Vibration*



**Trunnion**



**Variable (Adjustable) Wall Mount**



**Fixed Wall Mount**



## Life Safety Wall Applications



### EM Battery Backup Available

Factory Installed Back Box for 0°C (32°F) or -20°C (-4°F) Wall Applications

## Field Installed Accessories



### Backlight Shield

Reduces backlight to <10%



### Visual Comfort Lens

Reduces glare & improves uniformity



### Visors

Top or bottom, combine for full visor



## Ordering Matrix

FAMILY	WATTAGE	VOLTAGE	DISTRIBUTION	-	CCT	COLOR	MOUNTING
<b>M</b> = M Series	<b>40</b> = 40W	<b>U</b> = 120-277V	<b>3G</b> = Type 3 Low Glare	-	<b>CS</b> = 3000/4000/5000K	<b>B</b> = Dark Bronze  <i>Contact Maxlite for additional finishes</i>	<b>A</b> = Straight Arm, Pole Mount
	<b>55</b> = 55W	<b>H</b> = 277-480V	<b>3M</b> = Type 3 Medium				<b>F</b> = Flexible Arm, Pole Mount
	<b>75</b> = 75W		<b>4N</b> = Type 4 Narrow				<b>K</b> = Knuckle Slip Fitter
	<b>100</b> = 100W		<b>4W</b> = Type 4 Wide				<b>T</b> = Trunnion
	<b>125</b> = 125W		<b>5S</b> = Type 5 Square/Flood Soft Wide (6x7)				<b>V</b> = Variable (Adjustable) Wall Mount
	<b>150</b> = 150W		<b>N</b> = Narrow Flood (4x4)				<b>W</b> = Fixed Wall Mount
	<b>200</b> = 200W		Flood Concentrated				
	<b>250</b> = 250W		<b>W</b> = Wide (6x6), Type 5 Low Glare				
<b>320</b> = 320W							

OPTIONS	EM OPTIONS	OTHER CONTROLS
<b>CR</b> = Controls Ready, C-Max Compatible	<b>E0</b> = Battery Backup, 0°C, Wall Applications Only	<b>RPC</b> = 3-pin Twist Lock Receptacle
<b>AV</b> = Avi-on Controls (factory installed)	<b>E2</b> = Battery Backup, -20°C, Wall Applications Only	<b>PR7</b> = 7-pin Twist Lock Receptacle

EM and Other Controls are factory installed.

Product Video:



Controls Installation Video:

